



BIGGER 5 COLLECTION

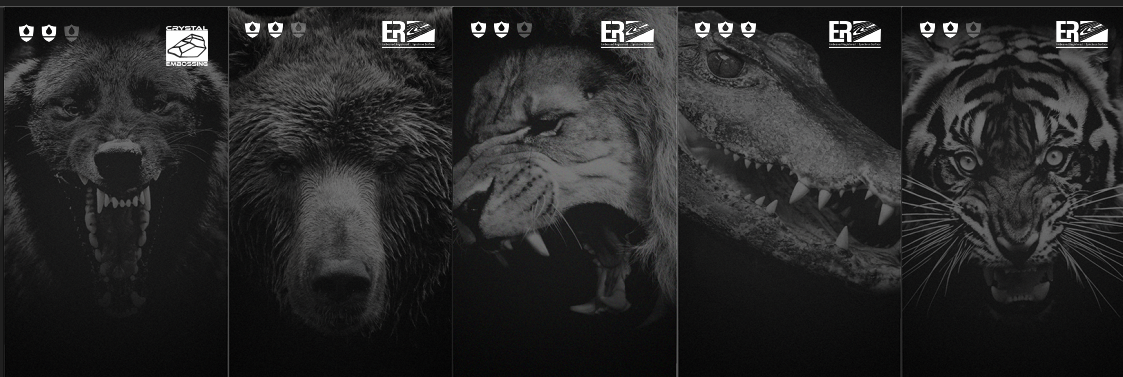

| CHARACTERISTICS | | STANDARDS | WOLF | GRIZZLY | LION | CROCODILE | TIGER |
|--------------------------|-----------------------------------|---|---|---|---|---|---|
| Floor Properties | Total Thickness | EN ISO 24346 | 4.5mm | 5.5mm | 7mm | 7.5mm | 6mm |
| | Acoustic Solution | EN ISO 24346 | 1mm IXPE | 1.5mm (With antibacterial Bio-Guard) | 1.5mm (With antibacterial Bio-Guard) | 1.5mm (With antibacterial Bio-Guard) | 1.5mm (With antibacterial Bio-Guard) |
| | Wear Layer | EN ISO 24340 | 0.3mm | 0.5mm | 0.55mm | 0.55mm | 0.55mm |
| | Finish | | UV COATING | UV COATING | UV COATING | UV COATING | UV COATING |
| | Surface | | Micro-bevel | EIR+Bevelled Edge | Herringbone EIR+Bevelled Edge | EIR+Bevelled Edge | EIR+Bevelled Edge |
| | Installation Method | | Uniclic Locking - Glueless Floating | Uniclic Locking - Glueless Floating | Uniclic Locking - Glueless Floating | Uniclic Locking - Glueless Floating | Uniclic Locking - Glueless Floating |
| Usage Class | EN 10874 (of EN 16511) | 23/32 | 23/34 | 23/34 | 23/34 | 23/34 | |
| Packing Information | Planks Size (L*W) | | 1218mm*181mm | 1218mm*228mm | 592mm*148mm | 1218mm*228mm | 1800mm*228mm |
| | Pallet Size (W*L*H) | | 1000*1250*760mm | 1000*1250*760mm | 1000*1250*750mm | 1000*1250*760mm | 1000*1830*680mm |
| | Planks/package (sqm/package) | | 10 (2.20 sqm) | 8 (2.22 sqm) | 16 (1.40 sqm) | 6 (1.66 sqm) | 5 (2.05 sqm) |
| | Weight/package | | 16.91kg | 19.38kg | 16.50kg | 22.44kg | 20kg |
| | Package/pallet | | 55 | 48 | 60 | 48 | 60 |
| | sqm/pallet | | 121 | 107 | 84 | 80 | 123 |
| | sqm/container | | 2904 | 2568 | 1764 | 1600 | 2091 |
| | Pallet/container | | 24 | 24 | 21 | 20 | 17 |
| | Package/container | | 1320 | 1152 | 1260 | 960 | 1020 |
| Total weight/pallet | | 950kg | 960kg | 1040kg | 1077kg | 1200kg | |
| Behaviour to Heat | Reaction to Fire (CE) | EN 13501-1 | Bfl-S1 | Bfl-S1 | Bfl-S1 | Bfl-S1 | Bfl-S1 |
| | Thermal Conductivity | EN 12667 | 0.087 W/(m·K) | 0.110 W/(m·K) | 0.131 W/(m·K) | 0.143 W/(m·K) | 0.107 W/(m·K) |
| | Thermal Resistance | EN 12667 | 0.030 (m²·K)/W | 0.030 (m²·K)/W | 0.030 (m²·K)/W | 0.030 (m²·K)/W | 0.030 (m²·K)/W |
| | Curling after Exposure to Heat | EN ISO 23999 | No curling | ≤ 0.5 mm | ≤ 0.5 mm | ≤ 1.0 mm | ≤ 0.5 mm |
| | Underfloor Heating suitability | | Suitable, max 27°C | Suitable, max 27°C | Suitable, max 27°C | Suitable, max 27°C | Suitable, max 27°C |
| Technical Features | Static Electrical Propensity (CE) | EN 14041 | 0.5kV, Pass | 0.5kV, Pass | 0.5kV, Pass | 0.5kV, Pass | 0.5kV, Pass |
| | Slip Resistance (CE) | EN 13893 | D5 | D5 | D5 | D5 | D5 |
| | Slip Resistance (Ramp Test) | DIN 51130 | R9 | R9 | R9 | R9 | R9 |
| | Abrasion Resistance | EN 15468, Annex A | > 7300 revolutions (≥ 7000 for Class 34) | > 7300 revolutions (≥ 7000 for Class 34) | > 7300 revolutions (≥ 7000 for Class 34) | > 7300 revolutions (≥ 7000 for Class 34) | > 7300 revolutions (≥ 7000 for Class 34) |
| | Locking Strength | EN 24334 | Long edge: 4.5 kN/m, short edge: 5.5 kN/m | Long edge: 4.5 kN/m, short edge: 5.5 kN/m | Long edge: 4.5 kN/m, short edge: 5.5 kN/m | Long edge: 4.5 kN/m, short edge: 5.5 kN/m | Long edge: 4.5 kN/m, short edge: 5.5 kN/m |
| | Castor Chair Resistance | ISO 4918 | Pass (Type W, > 25000 cycles) | Pass (Type W, > 25000 cycles) | Pass (Type W, > 25000 cycles) | Pass (Type W, > 25000 cycles) | Pass (Type W, > 25000 cycles) |
| | Effect of Furniture Leg | EN ISO 16581 | Pass | Pass | Pass | Pass | Pass |
| | Microscratch Resistance | DIN EN 16094 | MSR-A3 | MSR-A2 | MSR-A2 | MSR-A2 | MSR-A2 |
| | Residual Indentation | EN ISO 24343-1 | 0.03mm | 0.04mm | 0.04mm | 0.04mm | 0.04mm |
| | Dimensional Stability | EN ISO 23999 | ≤ 0.05% | ≤ 0.05% | ≤ 0.05% | ≤ 0.05% | ≤ 0.05% |
| Impact Sound Improvement | EN ISO 717-2 | ΔLw = 21 dB | ΔLw = 20 dB | ΔLw = 20 dB | ΔLw = 20 dB | ΔLw = 20 dB | |
| Resistance to Stain | EN 438-2 | Group 1: Grade 5 Group 2: Grade 4 Group 3: Grade 4/5/5 | Group 1: Grade 4 Group 2: Grade 5 Group 3: Grade 4/5/5 | Group 1: Grade 4 Group 2: Grade 5 Group 3: Grade 4/5/5 | Group 1: Grade 4 Group 2: Grade 5 Group 3: Grade 4/5/5 | Group 1: Grade 4 Group 2: Grade 5 Group 3: Grade 4/5/5 | |
| Impact Resistance | EN 13329 | > 1800mm | > 1800mm | > 1800mm | > 1800mm | > 1800mm | |
| Toxic Substances | Formaldehyde / VOC Emissions | EN 717-1 | E1 / VOC Free | E1 / VOC Free | E1 / VOC Free | E1 / VOC Free | E1 / VOC Free |
| | Greenguard | | Pass | Pass | Pass | Pass | Pass |
| | Phthalate Free | | Yes | Yes | Yes | Yes | Yes |

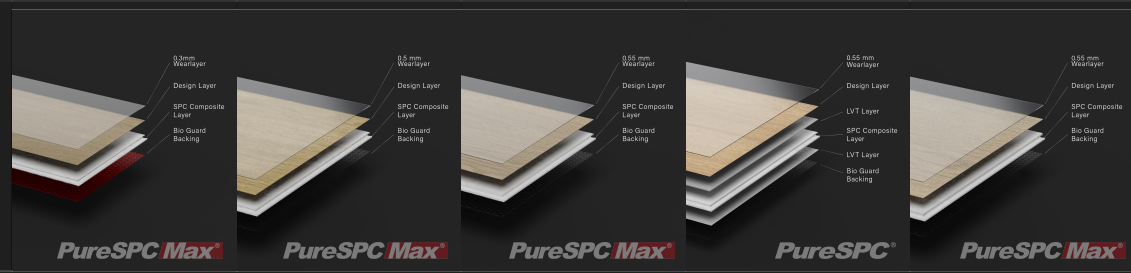

European Headquarters
Lise-Meitner-Str.1, 82152 Krailling
München, Germany

Distribution Hub
Ferdinand-Gabriel-Weg 4-9 50834
Soest, Germany