


DRYBACK COLLECTION

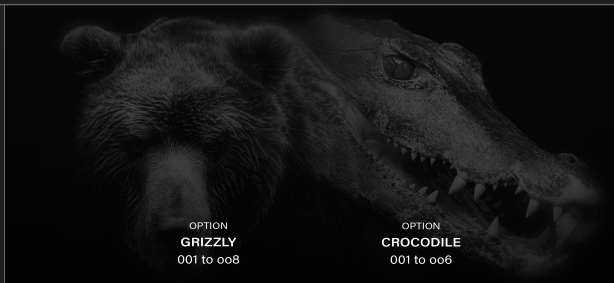

OPTION
GRIZZLY
001 to 008

OPTION
CROCODILE
001 to 006

CHARACTERISTICS		STANDARDS	Grizzly A / Crocodile
Floor Properties	Total Thickness	EN ISO 24346	2.5mm
	Wear Layer	EN ISO 24340	0.55mm
	Finish		UV COATING
	Surface		Registered Embossing (EIR)
	Installation Method		Gluedown
	Usage Class	EN 10874 (of EN ISO 10582)	
Packing Information	Planks Size (L*W)		1219*228mm
	Pallet Size (W*L*H)		1000*1250*720mm
	Planks/package (sqm/package)		16 (4.44sqm)
	Weight/package		21.66kg
	Package/pallet		52
	sqm/pallet		230.8
	sqm/container		4617
	Pallet/container		20
	Package/container		1040
Total weight/pallet		1146kg	
Behaviour to Heat	Behaviour to Fire (CE)	EN 13501-1	Bfl-S1
	Thermal Conductivity	EN 12667	0.307 W(m-K)
	Thermal Resistance	EN 12667	0.0074 (m ² ·K)/W
	Curling after Exposure to Heat	EN ISO 23999	≤ 1.0 mm
	Underfloor Heating Suitability		Suitable, max. 27°C
Technical Features	Static Electrical Propensity (CE)	EN 14041	0.5kV, Pass
	Slip Resistance (CE)	EN 13893	DS
	Slip Resistance (Ramp Test)	DIN 51130	R9
	Abrasion Resistance	EN 15468, Annex A	> 9000 revolutions (≥ 7000 for Class 34)
	Castor Chair Resistance	ISO 4918	Pass (Type W, > 25000 cycles)
	Microscratch Resistance	DIN EN 16094	MSR-A2
	Colour Fastness	ISO 105-B02	> 6
	Residual Indentation	EN ISO 24343-1	0.00mm (≤ 0.1mm)
	Dimensional Stability	EN ISO 23999	≤ 0.15%
	Resistance to Stain	EN 438-2	Group 1: Grade 5 Group 2: Grade 5 Group 3: Grade 4/5/5
Toxic Substances	Formaldehyde / VOC Emissions	EN 717-1	E1 / VOC Free
	Greenguard		Pass
	Phthalate Free		Yes

